


BAAJ Swivel pipes



BAAJ Swivel pipes

These pipes are composed of one pipe pushed in another and held in place on bearings pinched between flanges.

Designed to be used in situations where a lot of movements are required, the lower pipe can pivot freely on 360°.

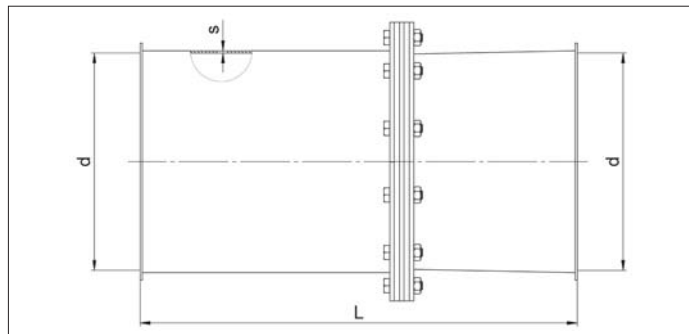

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032.
Electrostatically conductive powder coating thickness of 30 to 60 µm.
Temperature resistance up to +80°C.


Type

Rolled sheets with 6 mm edges for lock rings.

Options

- electro-galvanized or stainless steel execution
- other colors
- other lengths
- other diameters
- 3 mm sheet thickness, depending on length and diameter
- other types of edges or connections

! Think of airflow direction when installing.

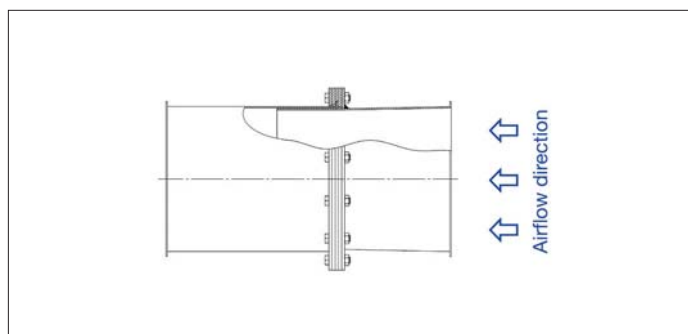

Ø d mm	Code	L mm	s mm	Weight kg
160	BAAJ000001	450	2.00	4.20
180	BAAJ000002	450	2.00	4.50
200	BAAJ000003	450	2.00	5.20
250	BAAJ000004	450	2.00	7.10
300	BAAJ000005	450	2.00	8.40