


BABB Bends R=D 5°

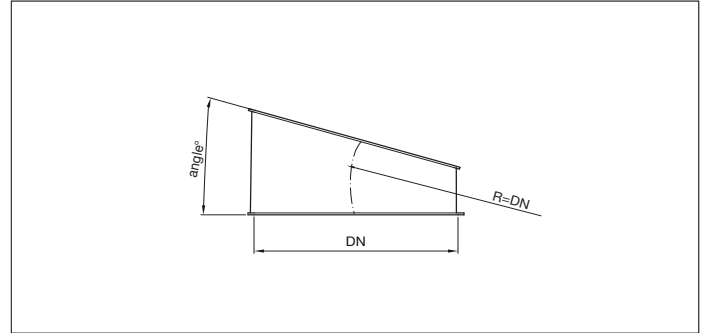

BABB Bends R=D - 5°

The segmented bends are made of a fully welded segment with a sheet thickness of 2.00 mm.

These bends are suitable for the transport of waste materials such as dust and chips but also for the transport of grains and such.

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032. Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm. Temperature resistance up to +80°C.

Type

Rolled sheets with 6 mm edges for lock rings.

Options

- FDA and EU compliant food-grade quality
- hot-dipped galvanized or stainless steel execution
- wear resistant lining as of Ø150 (83° Shore), only on segmented models
- equipotential equalization
- other colors
- other diameters
- other sheet thickness, depending on radius and diameter
- other types of edges or connections

* Segmented models

Ø d mm	Code	R mm	# of segments	s mm	Weight kg
100*	BABB000193	320	1	2.00	0.15
120*	BABB000194	360	1	2.00	0.24
140*	BABB000195	460	1	2.00	0.35
150*	BABB000196	500	1	2.00	0.45
160*	BABB000197	580	1	2.00	0.51
175*	BABB000198	560	1	2.00	0.56
200*	BABB000199	690	1	2.00	0.71
224*	BABB000200	560	1	2.00	0.73
250*	BABB000201	635	1	2.00	0.75
280*	BABB000202	560	1	2.00	0.82
300*	BABB000203	625	1	2.00	0.89
315*	BABB000204	600	1	2.00	4.05
350*	BABB000205	350	1	2.00	7.20
400*	BABB000206	400	1	2.00	0.95
450*	BABB000207	450	1	2.00	1.40
500*	BABB000208	500	1	2.00	1.45
550*	BABB000209	550	1	2.00	1.55
560*	BABB000210	560	1	2.00	1.80
600*	BABB000211	600	1	2.00	1.90
630*	BABB000212	630	1	2.00	2.10