


BAAB Telescope pipes - 500 mm

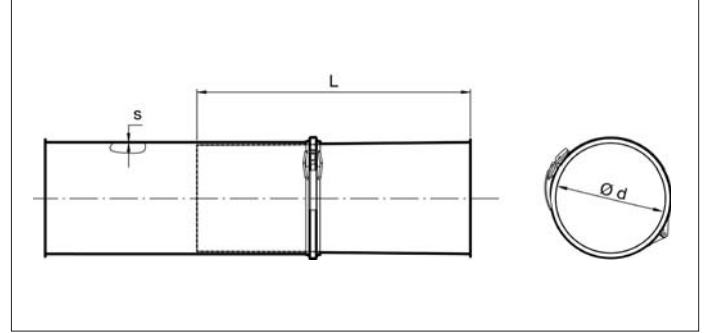

BAAB Telescope pipes - 500 mm

Insert pipes are standard longitudinally welded with a sheet thickness of 2.00 mm.

The ring and seal is sold separately and needs to be chosen in function of the customer requirements (rapid-lock or two-part ring and EPDM, NBR or Silicone seal, see section on rings).

The regulating length range is from +20 mm to +450 mm.

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032. Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm. Temperature resistance up to +80°C.


Type

Rolled sheets with 6 mm edges for lock rings. Ring and seal not included.

Options

- FDA and EU compliant food-grade quality
- hot-dipped galvanized or stainless steel execution
- equipotential equalization
- other colors
- other lengths
- other diameters
- other sheet thicknesses, depending on length and diameter
- other types of edges or connections

! Think of airflow direction when installing.

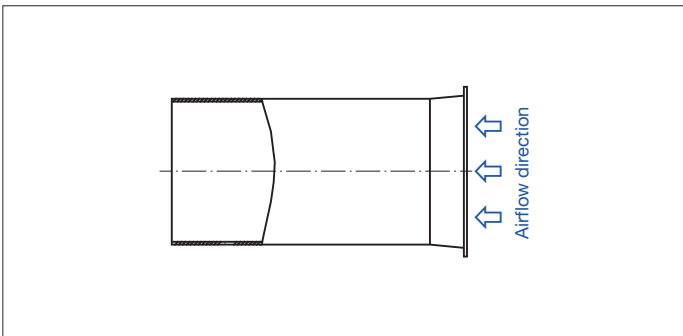

Ø d mm	Code	L mm	s mm	Weight kg
100	BAAB000028	493	1.50	2.30
120	BAAB000029	493	1.50	2.56
140	BAAB000030	493	1.50	2.86
150	BAAB000042	493	2.00	3.46
160	BAAB000043	493	2.00	3.28
175	BAAB000044	493	2.00	3.10
200	BAAB000045	493	2.00	4.84
224	BAAB000046	493	2.00	5.46
250	BAAB000047	493	2.00	6.08
280	BAAB000048	493	2.00	6.64
300	BAAB000049	493	2.00	7.14
315	BAAB000050	493	2.00	7.60
350	BAAB000051	493	2.00	8.60
400	BAAB000052	493	2.00	7.20