


Wide rings GAAF

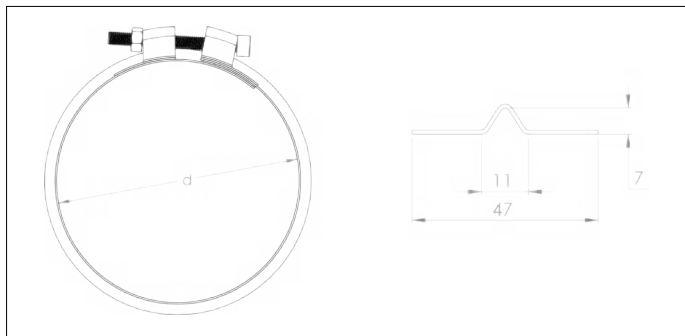

Wide rings GAAF

Rings in one part, without seal, with one M8x80 bolt.

Greater lengths can be assembled with wide rings in comparison with slim rings. Can only be used on straight ducting or conical ducting with 50 mm straight extensions.

Our new and improved model includes a lock mechanism on both sides of the bolt to hold it in place that also strengthens the whole assembly.

❗ For assembly of ducting from 0.75 mm up to 1.5 mm.
As an option, a rubber seal can be added for better airtightness.



Material

Galvanized steel

Options

- other diameters
- seals (GZFJ)
- Terostat sealants
- stainless steel AISI 304 (GBAF)

❗ Maximum tightening torque as of Ø450 : 10 Nm.



Ø	Code	Ød mm	Weight kg
150	GAAF000002	151.5	0.20
160	GAAF000003	161.5	0.21
180	GAAF000004	181.5	0.22
200	GAAF000005	201.5	0.23
225	GAAF000006	226.5	0.25
250	GAAF000007	251.5	0.26
275	GAAF000008	276.5	0.28
300	GAAF000009	301.5	0.30
315	GAAF000010	316.5	0.31
350	GAAF000011	351.5	0.38
400	GAAF000012	401.5	0.43
450	GAAF000013	451.5	0.47
500	GAAF000014	501.5	0.51
550	GAAF000015	551.5	0.55
600	GAAF000016	601.5	0.59
630	GAAF000017	631.5	0.62
650	GAAF000018	651.5	0.64
700	GAAF000019	701.5	0.68
750	GAAF000020	751.5	0.72
800	GAAF000021	801.5	0.76
850	GAAF000022	851.5	0.80
900	GAAF000023	901.5	0.84
950	GAAF000024	951.5	0.88
1000	GAAF000025	1001.5	0.93