


Rapid lock rings with PVC insert GAAS

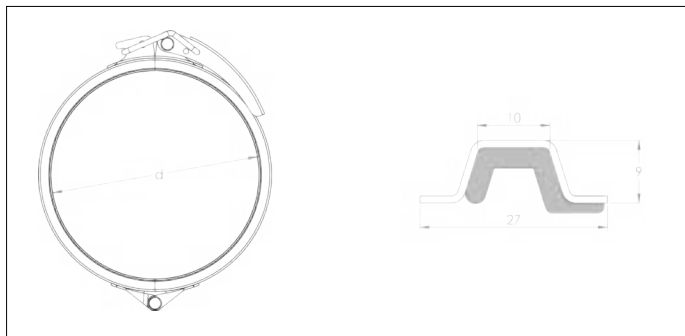

Rapid lock ring with black PVC insert GAAS

Rings with integrated black PVC insert with handle and hinge, for use with telescope pipes (AAAB).

From Ø 80 up to Ø 400 mm with integrated hinge and handle.
From Ø 450 mm, it is supplied without hinge and with an M8x80 bolt.

Material

Galvanized steel with black PVC insert

Options

- other diameters
- stainless steel AISI 304 (GBAS)

❗ For assembly of ducting from 0.75 mm up to 1.25 mm.

❗ Maximum tightening torque as of Ø450 : 10 Nm.



Model without handle & hinge

Ø	Code	Ød mm	Weight kg
80	GAAS000001	81.5	0.18
100	GAAS000002	101.5	0.21
120	GAAS000003	121.5	0.23
125	GAAS000020	126.5	0.24
140	GAAS000004	141.5	0.26
150	GAAS000005	151.5	0.27
160	GAAS000006	161.5	0.27
180	GAAS000007	181.5	0.30
200	GAAS000008	201.5	0.32
225	GAAS000009	226.5	0.35
250	GAAS000010	251.5	0.38
275	GAAS000011	276.5	0.41
300	GAAS000012	301.5	0.44
315	GAAS000013	316.5	0.46
350	GAAS000014	351.5	0.50
400	GAAS000015	401.5	0.56
450	GAAS000016	451.5	0.55
500	GAAS000017	501.5	0.61
550	GAAS000018	551.5	0.67
600	GAAS000019	601.5	0.72
630	GAAS000022	631.5	0.76