


## AAAS Telescope pipes

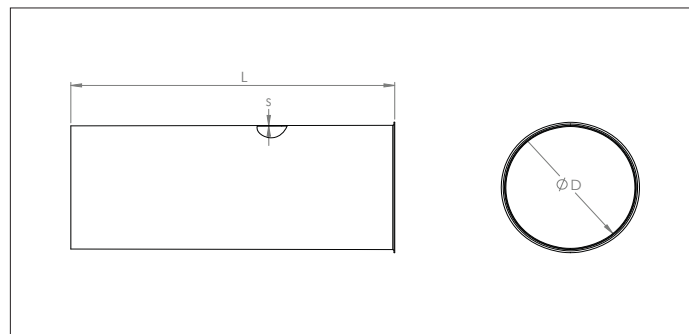

### Telescope pipes

Telescope pipes are standard longitudinally welded with a stitch-welder for use in overpressure, under-pressure and pressureless systems.

It is assembled in combination with a standard pipe (AAAA) and a rapid-lock ring with seal for telescope pipe (GAAS), both sold separately.

The regulating length is from +20 mm to +450 mm.

### Material

Sendzimir galvanized DX51 DZ 275 MAC.


### Type

Rolled stitch-welded sheets with 6 mm edges for lock rings.

### Options

- other diameters
- other sheet thicknesses depending on diameter and length
- other types of edges or connections

! Think of airflow direction when installing.

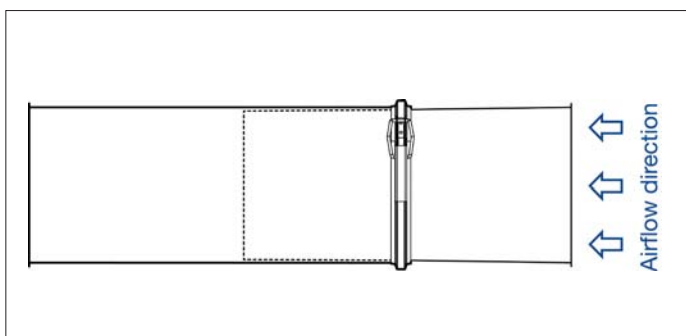

Ø d mm	Code	L mm	s mm	Weight kg
80	AAAS000001	490	0.75	0.75
100	AAAS000002	490	0.75	0.94
120	AAAS000003	490	0.75	1.13
125	AAAS000021	490	0.75	1.18
140	AAAS000004	490	0.75	1.32
150	AAAS000005	490	0.75	1.41
160	AAAS000006	490	0.75	1.51
180	AAAS000007	490	0.75	1.70
200	AAAS000008	490	0.75	1.88
225	AAAS000009	490	0.75	2.12
250	AAAS000010	490	0.75	2.36
275	AAAS000011	490	0.75	2.59
280	AAAS000022	490	0.75	2.64
300	AAAS000012	490	0.75	2.83
315	AAAS000013	490	0.75	3.48
350	AAAS000014	490	0.75	3.87
400	AAAS000015	490	0.88	4.42
450	AAAS000016	490	0.88	4.97
500	AAAS000017	490	0.88	5.53
550	AAAS000018	490	0.88	6.08
600	AAAS000019	490	0.88	6.63
630	AAAS000020	490	0.88	6.96