


AADJ manual throttle valves with seal

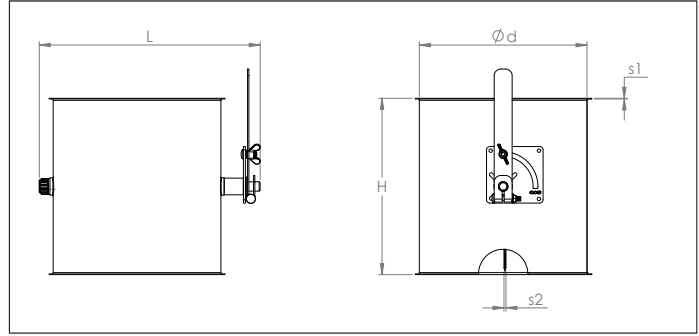

AADJ manual throttle valves with seal

Longitudinally stitch-welded throttle valves with a material thickness of 1 mm with an inner blade with with seal with a material thickness of 3 mm for use in overpressure, under-pressure and pressureless systems.

The throttle valves have a regulating handle with star-knob to secure the blade in a fixed position.

Axle seals are used and a natural rubber seal is applied to the valve blade for better airtightness.

Material

Sendzimir galvanized DX51 DZ 275 MAC and EPDM blade seal.

Type

Rolled sheets, stitch-welded, with 6 mm edges for lock rings. Provided with regulating handle with star-knob.

Options

- other diameters
- other sheet thicknesses depending on diameter and length
- other valve seals, for example silicone, NBR, etc.
- other types of edges or connections

Ø	Code	L mm	H mm	s1 mm	s2 mm	Weight kg
80	AADJ000025	162	95	0.88	2 x 1.00 + seal	0.78
100	AADJ000026	182	115	0.88	2 x 1.00 + seal	0.88
120	AADJ000027	202	135	0.88	2 x 1.00 + seal	1.03
125	AADJ000046	207	140	0.88	2 x 1.00 + seal	1.06
140	AADJ000028	222	155	0.88	2 x 1.00 + seal	1.26
150	AADJ000029	232	165	0.88	2 x 1.00 + seal	1.34
160	AADJ000030	242	175	0.88	2 x 1.00 + seal	1.42
180	AADJ000031	262	195	0.88	2 x 1.00 + seal	1.74
200	AADJ000032	282	215	0.88	2 x 1.00 + seal	1.94
225	AADJ000033	307	240	0.88	2 x 1.00 + seal	2.34
250	AADJ000034	332	265	0.88	2 x 1.00 + seal	2.77
275	AADJ000035	357	290	0.88	2 x 1.00 + seal	3.24
280	AADJ000045	362	295	0.88	2 x 1.00 + seal	3.30
300	AADJ000036	382	315	0.88	2 x 1.00 + seal	3.75
315	AADJ000037	397	330	0.88	2 x 1.00 + seal	4.08
350	AADJ000038	432	365	0.88	2 x 1.00 + seal	4.90
400	AADJ000039	482	415	0.88	2 x 1.00 + seal	6.23