

AAAG Inspection doors type 'M'




Inspection doors type 'M'


Inspection doors type 'M' can easily be applied to existing pipes.

The cover is completely demountable and stays airtight after frequent use.

Available in different sizes, with an inner and outer cover with two star knobs.

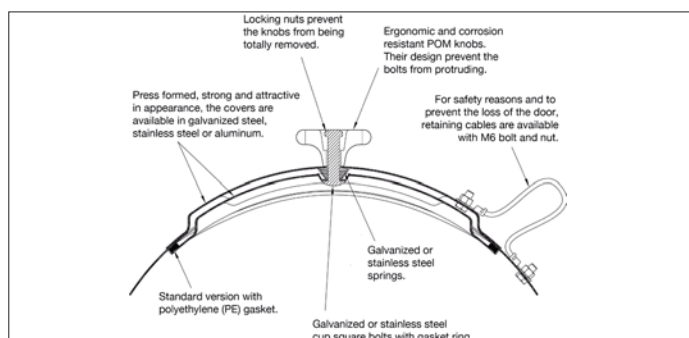

⚠ Please state pipe diameter when ordering!

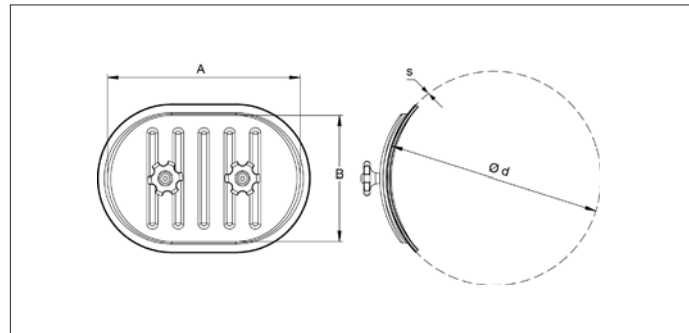

Material

Sendzimir galvanized DX51 DZ 275 MAC.

Type

Pressed sheet, with Polyethylene (PE) gasket and POM knobs.
Operating temperature : max. +70 °C.

Options

- other materials (stainless steel or aluminum)
- with rubber edge molding (SKK) and POM knobs, operating temperature: max. +80 °C
- with ceramic wool gasket and metal knobs (HT), operating temperature galvanized steel: max. +200 °C, operating temperature stainless steel version: max. +300 °C
- with silicon gasket and POM knobs, operating temperature: max. +80 °C
- with silicon gasket and metal knobs (HT), operating temperature: max. +200 °C
- retaining cable with M6 bolt to prevent the loss of the door
- for rectangular ducting

Ø d mm	Code	A x B mm	s mm	Weight kg
80	AAAG000017	180 x 80	1.00	0.29
100	AAAG000018	180 x 80	1.00	0.29
120 to 125	AAAG000019	180 x 80	1.00	0.29
140 to 150	AAAG000002	180 x 80	1.00	0.29
160 to 180	AAAG000003	200 x 100	1.00	0.32
200 to 225	AAAG000004	200 x 100	1.00	0.32
250	AAAG000005	200 x 100	1.00	0.32
275 to 300	AAAG000006	300 x 200	1.00	1.05
315	AAAG000007	300 x 200	1.00	1.05
350	AAAG000008	300 x 200	1.00	1.05
400	AAAG000009	300 x 200	1.00	1.05
450	AAAG000010	400 x 300	1.00	2.00
500	AAAG000011	400 x 300	1.00	2.00
550	AAAG000012	400 x 300	1.00	2.00
600	AAAG000013	400 x 300	1.00	2.00
630	AAAG000014	400 x 300	1.00	2.00
650	AAAG000015	400 x 300	1.00	2.00
700	AAAG000016	400 x 300	1.00	2.00