


## AAAH Swivel pipes



### Swivel pipes

These pipes are composed of one pipe inserted in another and held in place on bearings pinched between flanges for use in under-pressure and pressureless systems...

Designed to be used in situations where a lot of movements are required, the lower pipe can pivot freely on 360°.

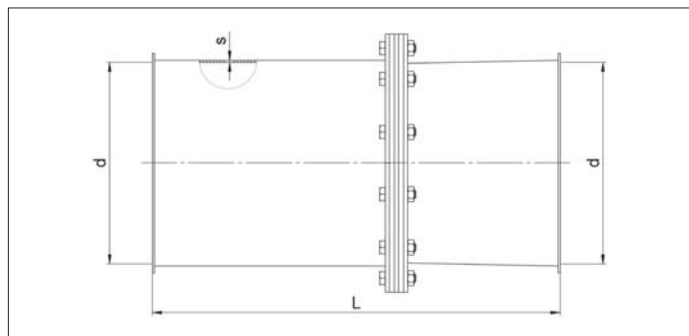

### Material

Electro-galvanized black steel 1.0330.


### Type

Rolled full welded sheets with 6 mm edges for lock rings.

### Options

- other diameters
- other types of edges or connections

⚠ Think of airflow direction when installing.

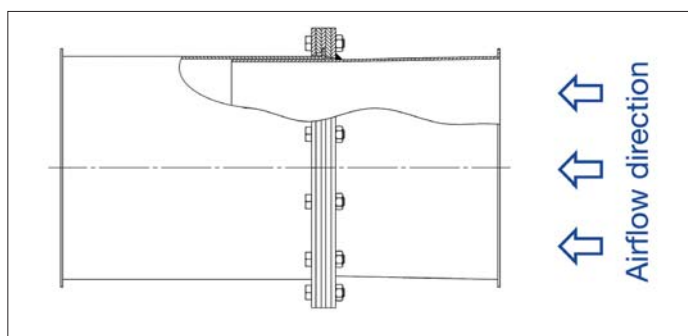

Ø d mm	Code	L mm	s mm	Weight kg
150	AAAH000001	450	1.50	5.10
160	AAAH000002	450	1.50	5.99
200	AAAH000003	450	1.50	7.24
250	AAAH000004	450	1.50	9.19
300	AAAH000005	450	1.50	10.94