


BAAC Inspection pipes

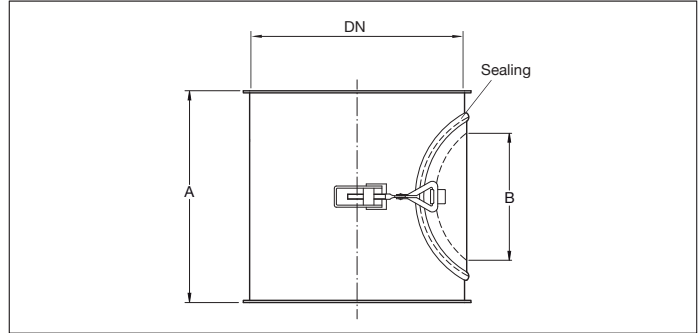

BAAC Inspection pipes

Full welded inspection pipes with round access door with a sheet thickness of 1.50 mm. The locking mechanism is threaded to regulated the stiffness of the closing of the rapidlock handle.

Airtightness is insured by a silicone seal all around the lip of the door.

These inspection pipes are suitable for the transport of waste materials such as dust and chips but also for the transport of grains and such.

Material

1.50 mm black steel 1.0330 powder coated in RAL 7032.
Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.
Temperature resistance up to +80°C.

Type

Rolled sheets with 6 mm edges for lock rings.
Silicone seal and adjustable locking mechanism and hinge.

Options

- FDA and EU compliant food-grade quality
- electro-galvanized or stainless steel execution
- equipotential equalization
- other colors
- other types of edges or connections

Ø d mm	Code	A mm	B mm	s mm	Weight kg
100	BAAC000002	200	120	1.50	0.93
120	BAAC000003	200	120	1.50	1.20
140	BAAC000004	200	120	1.50	1.48
150	BAAC000005	200	120	1.50	1.99
160	BAAC000006	200	120	1.50	2.07
175	BAAC000007	200	120	1.50	2.15
200	BAAC000008	200	120	1.50	2.73
224	BAAC000009	200	120	1.50	2.87
250	BAAC000010	200	120	1.50	3.05
280	BAAC000011	200	120	1.50	3.35
300	BAAC000012	200	120	1.50	3.81
315	BAAC000013	200	120	1.50	4.00
350	BAAC000014	200	120	1.50	4.35
400	BAAC000015	200	120	1.50	5.47