

BABB Bends R=D 30°




BABB Bends R=D - 30°

The pressed bends are made of two preformed halves and longitudinally fully welded together with a sheet thickness of 2.00 mm.

The segmented bends are made of welded segments fully welded together.

These bends are suitable for the transport of waste materials such as dust and chips but also for the transport of grains and such.

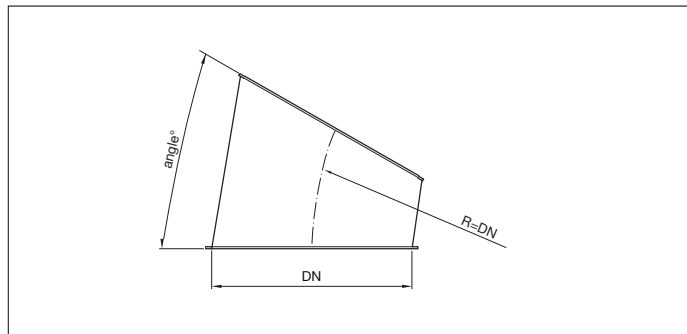

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032.
Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.
Temperature resistance up to +80°C.

Type

Pressed or rolled sheets with 6 mm edges for lock rings.

Options

- FDA and EU compliant food-grade quality
- hot-dipped galvanized or stainless steel execution
- wear resistant lining as of Ø150 (83° Shore), only on segmented models
- equipotential equalization
- other colors
- other diameters
- other sheet thickness, depending on radius and diameter
- other types of edges or connections

* Segmented models

Ø d mm	Code	R mm	# of segments	s mm	Weight kg
100	BABB000079	95	1	2.00	0.29
120	BABB000080	110	1	2.00	0.41
140*	BABB000081	140	2	2.00	0.57
150	BABB000082	175	1	2.00	0.73
160*	BABB000083	190	2	2.00	0.88
175	BABB000084	208	1	2.00	1.03
200	BABB000085	180	1	2.00	1.04
224*	BABB000086	195	2	2.00	1.31
250	BABB000087	230	1	2.00	1.58
280*	BABB000088	280	2	2.00	1.75
300	BABB000089	230	1	2.00	1.92
315*	BABB000090	315	2	2.00	2.60
350*	BABB000091	350	2	2.00	3.30
400*	BABB000092	400	2	2.00	4.10
450*	BABB000093	450	2	2.00	5.60
500*	BABB000094	500	2	2.00	6.60
550*	BABB000095	550	2	2.00	8.40
560*	BABB000096	560	2	2.00	9.00
600*	BABB000097	600	2	2.00	9.60
630*	BABB000098	630	2	2.00	10.50