
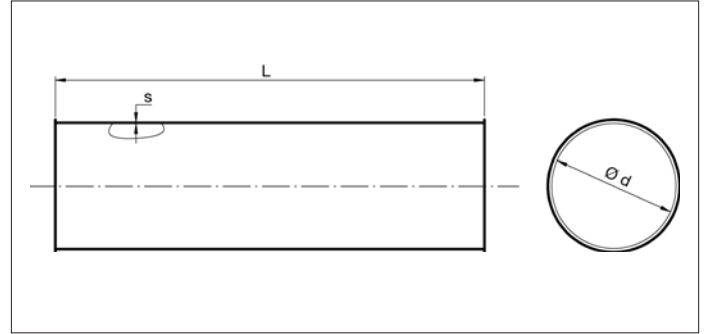


**AAAA Laser welded pipes - 1000 mm**

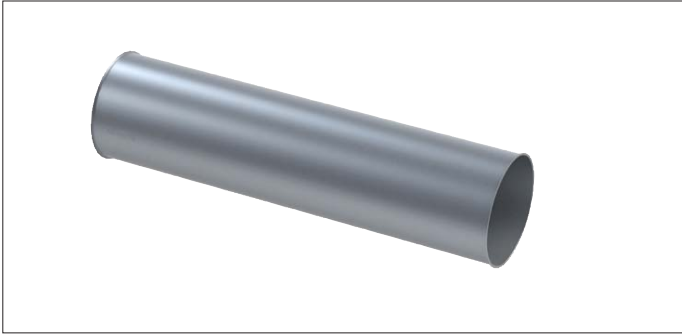

**Laser welded pipes**

Longitudinally laser welded pipes with a sheet thickness of 0.75 up to 1.25 mm for use in overpressure, under-pressure and pressureless systems.

This range has been developed to resist to 500 H<sup>2</sup>O under-pressure (5.000 Pa), see separate resistance chart (with flanges as of Ø700).

**Material**

Sendzimir galvanized DX51 DZ 275 MAC.

**Type**


Rolled laser welded sheets with 6 mm edges for lock rings.

**Options**

- other lengths
- other diameters
- other sheet thicknesses depending on diameter and length
- other types of edges or connections

Ø d mm	Code	L mm	s mm	Weight kg
80	AAAA000029	990	0.75	1,51
100	AAAA000030	990	0.75	1,88
120	AAAA000031	990	0.75	2,26
125	AAAA000227	990	0.75	4,52
140	AAAA000032	990	0.75	2,64
150	AAAA000033	990	0.75	2,83
160	AAAA000034	990	0.75	3,02
180	AAAA000035	990	0.75	3,39
200	AAAA000036	990	0.75	3,77
225	AAAA000037	990	0.75	4,24
250	AAAA000038	990	0.75	4,71
275	AAAA000039	990	0.75	5,18
280	AAAA000228	990	0.75	5,28
300	AAAA000040	990	0.75	5,65
315	AAAA000041	990	0.75	5,94
350	AAAA000042	990	0.75	6,60
400	AAAA000043	990	0.88	8,85
450	AAAA000044	990	0.88	9,95
500	AAAA000045	990	0.88	11,06
550	AAAA000046	990	1.00	12,12
600	AAAA000047	990	1.00	13,27
630	AAAA000048	990	1.00	13,93
650	AAAA000049	990	1.00	14,38
700	AAAA000134	990	1.00	17,60
750	AAAA000135	990	1.00	18,84
800	AAAA000136	990	1.00	20,12
850	AAAA000137	990	1.00	21,36
900	AAAA000138	990	1.00	22,62
950	AAAA000139	990	1.25	23,88
1000	AAAA000140	990	1.25	25,12

FA\_T01\_IDGALVA\_2022\_NS/V5.0.EN

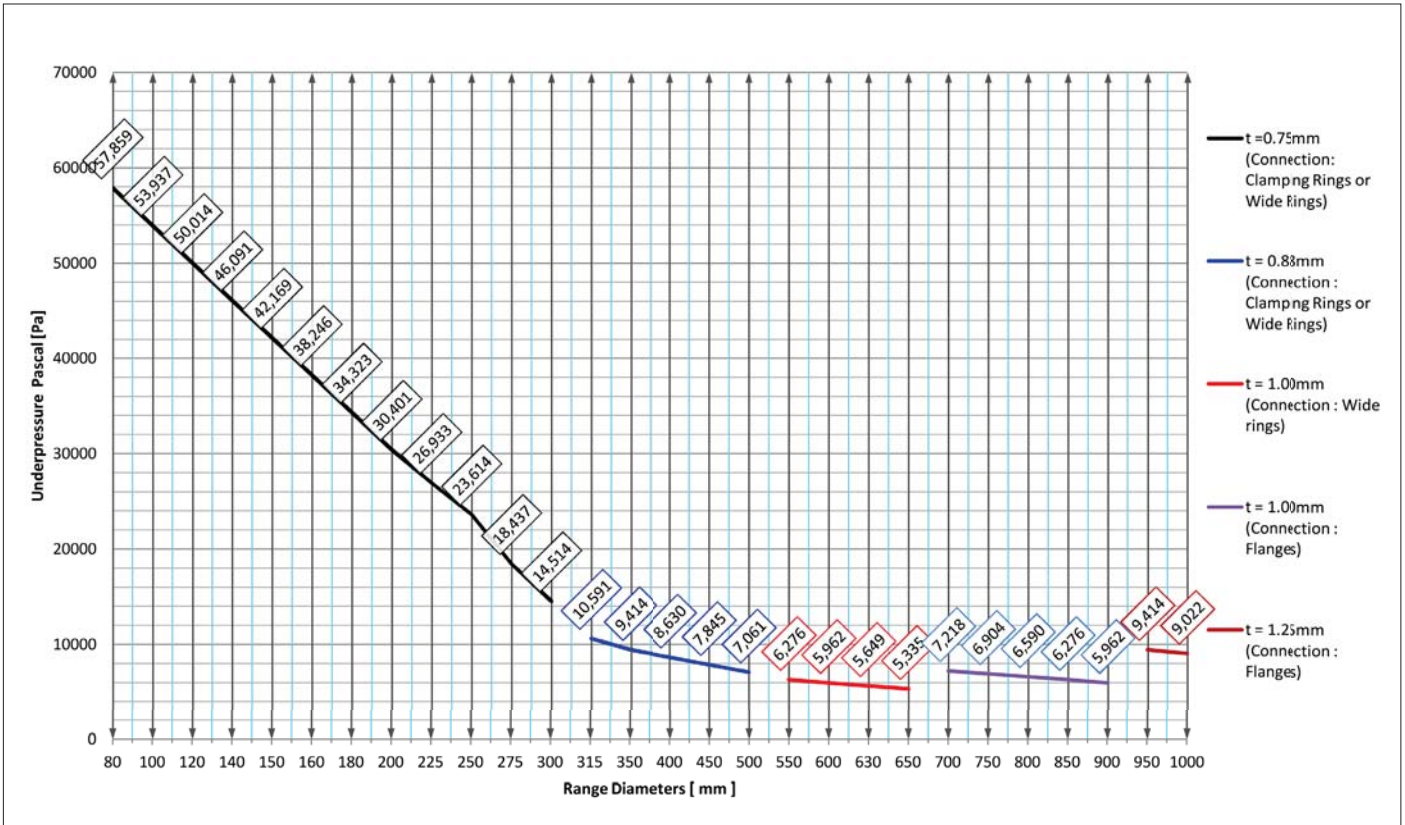

Maximum underpressure chart for standard Formula Air light gauge Sendzimir ducting.

Measures based on pipe length 2000 mm for diameters Ø80 to Ø450 and pipe length 1500 mm for diameters Ø500 to Ø1000.