

## BABD Adjustable bends




### BABD Adjustable bends

The pressed bends are made of two preformed halves assembled by a 2-part ring with seal.

The two halves can pivot on themselves to give different angles.

These bends are suitable for the transport of waste materials such as dust and chips but also for the transport of grains and such.

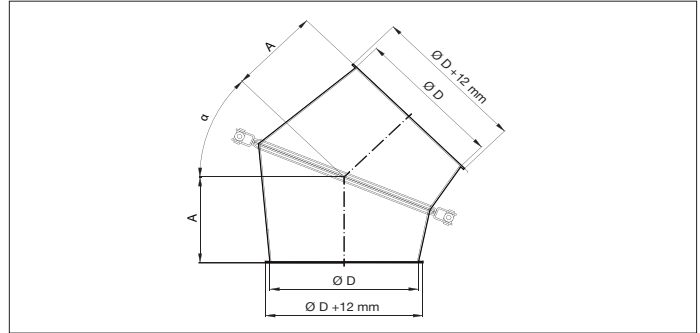

### Material

2.00 mm black steel 1.0330 powder coated in RAL 7032.

Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.

Temperature resistance up to +80°C.

### Type

Pressed or rolled sheets with 6 mm edges for lock rings.

Delivered with galvanized two-bolt ring and silicone seal.

### Options

- FDA and EU compliant food-grade quality
- stainless steel execution
- wear resistant lining as of Ø150 (83° Shore)
- equipotential equalization
- other colors
- other sheet thickness, depending on angle and diameter
- other types of edges or connections

Ø d mm	Code	A mm	Ø of ring	s mm	Weight kg
100	BABD000008	60	120	2.00	1.14
120	BABD000009	70	150	2.00	1.60
150	BABD000010	80	175	2.00	1.92
175	BABD000011	100	200	2.00	2.76
200	BABD000012	125	250	2.00	3.60
250	BABD000013	170	300	2.00	6.07
300	BABD000014	210	350	2.00	9.20