
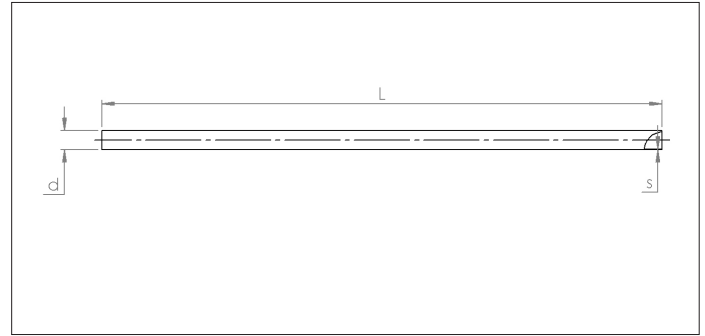


CAAA Pipes

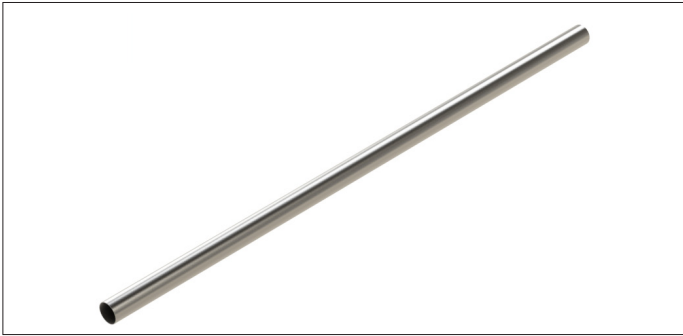

CAAA Pipes

Longitudinally welded pipes with a thickness of 1.25 to 2 mm and completely airtight in standard lengths of 3 or 6 meters.

Material

Sendzimir galvanized DX51 - Z200.

Type

With straight edges for a good connection with pipe connectors.



3 m pipes

Ø d	Code	Ø mm	L mm	S mm	Weight kg
50	CAAA000010	50	3000	1.20	4.40
63	CAAA000011	63	3000	1.20	5.55
76	CAAA000012	76	3000	1.50	8.38
89	CAAA000013	89	3000	1.50	9.81
102	CAAA000014	102	3000	1.50	11.26
114	CAAA000015	114	3000	1.50	12.58
127	CAAA000016	127	3000	1.50	14.00
152	CAAA000017	152	3000	2.00	16.76
203	CAAA000018	203	3000	2.00	22.38

6 m pipes

Ø d	Code	Ø mm	L mm	S mm	Weight kg
50	CAAA000001	50	6000	1.20	8.80
63	CAAA000002	63	6000	1.20	11.10
76	CAAA000003	76	6000	1.50	16.76
89	CAAA000004	89	6000	1.50	19.62
102	CAAA000005	102	6000	1.50	22.52
114	CAAA000006	114	6000	1.50	25.16
127	CAAA000007	127	6000	1.50	28.00
152	CAAA000008	152	6000	2.00	35.52
203	CAAA000009	203	6000	2.00	44.76

CBAAs pipes

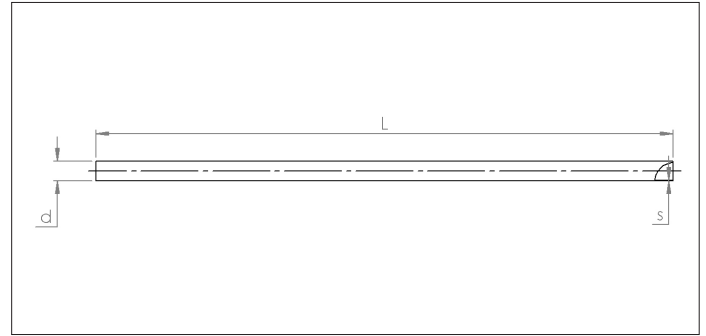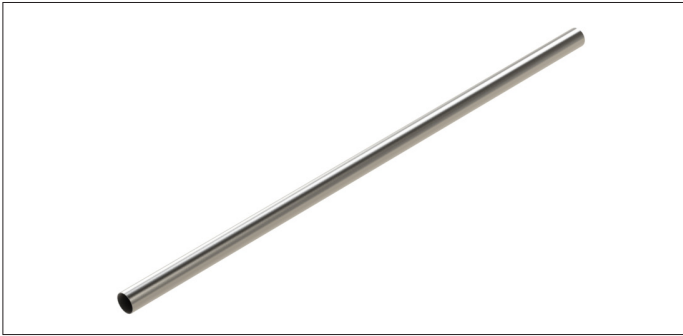

CBAAs pipes

Longitudinally welded pipes with a thickness of 1.5 to 2 mm and completely airtight with standard lengths of 3 or 6 meters.

Material

Stainless steel AISI 304L (1.4307) - DIN 11850.

Type

With straight edges for a good connection with pipe connectors.

6 m pipes

Ø d	Code	Ø mm	L mm	S mm	Weight kg
38	CBAA000001	38	6000	1.5	9.40
50	CBAA000002	50.8	6000	1.5	11.15
63	CBAA000003	63.5	6000	1.5	14.00
76	CBAA000004	76.1	6000	1.5	17.00
102	CBAA000005	101.6	6000	2.0	32.00

3 m pipes

Ø d	Code	Ø mm	L mm	S mm	Weight kg
38	CBAA000006	38	3000	1.5	4.70
50	CBAA000007	50.8	3000	1.5	5.60
63	CBAA000008	63.5	3000	1.5	7.00
76	CBAA000009	76.1	3000	1.5	8.50
102	CBAA000010	101.6	3000	2.0	16.00