


BABB Bends R=D 45°

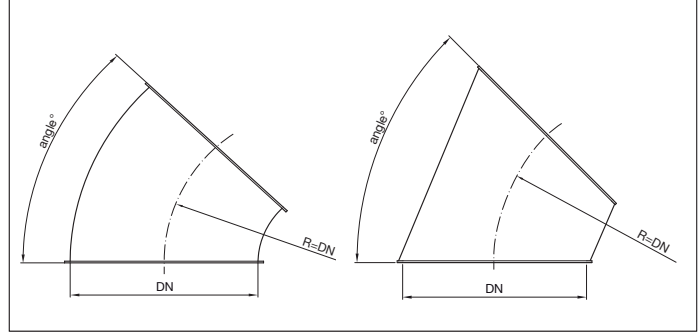

BABB Bends R=D - 45°

The pressed bends are made of two preformed halves and longitudinally fully welded together with a sheet thickness of 2.00 mm.

The segmented bends are made of welded segments fully welded together.

These bends are suitable for the transport of waste materials such as dust and chips but also for the transport of grains and such.

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032.
Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.
Temperature resistance up to +80°C.

Type

Pressed or rolled sheets with 6 mm edges for lock rings.

Options

- FDA and EU compliant food-grade quality
- hot-dipped galvanized or stainless steel execution
- wear resistant lining as of Ø150 (83° Shore), only on segmented models
- equipotential equalization
- other colors
- other diameters
- other sheet thickness, depending on radius and diameter
- other types of edges or connections

* Segmented models

Ø d mm	Code	R mm	# of segments	s mm	Weight kg
100	BABB000022	83	1	2.00	0.39
120	BABB000023	88	1	2.00	0.49
140*	BABB000024	112	4	2.00	0.71
150	BABB000025	150	1	2.00	0.92
160*	BABB000026	155	4	2.00	1.06
175	BABB000027	160	1	2.00	1.19
200	BABB000028	195	1	2.00	1.64
224*	BABB000029	155	4	2.00	1.85
250	BABB000030	195	1	2.00	2.05
280*	BABB000031	280	4	2.00	2.27
300	BABB000032	205	1	2.00	2.49
315*	BABB000033	315	4	2.00	4.20
350*	BABB000034	350	4	2.00	4.90
400*	BABB000035	400	4	2.00	6.50
450*	BABB000036	450	4	2.00	8.15
500*	BABB000037	500	4	2.00	10.00
550*	BABB000038	550	4	2.00	12.20
560*	BABB000039	560	4	2.00	12.80
600*	BABB000040	600	4	2.00	15.00
630*	BABB000041	630	4	2.00	17.00