


Slim rapid lock rings GAAJ

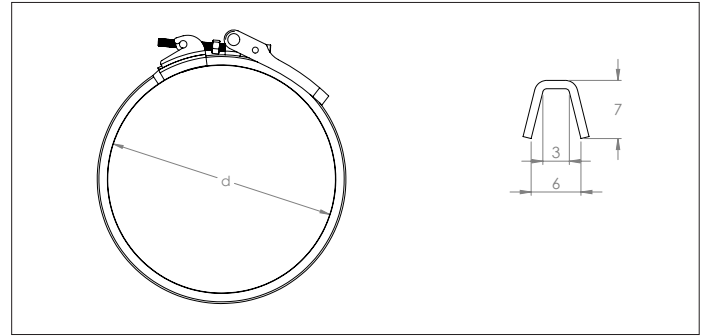

Slim rapid lock rings GAAJ

Rings with adjustable handle.

From Ø 80 up to Ø 125 mm (*) with adjustable handle and hinge. From Ø 140 mm, it is supplied without hinge and with an adjustable handle.


! For assembly of ducting from 0.75 mm up to 1.25 mm.
As an option, a rubber seal can be added for better airtightness.

Material

Galvanized steel

Options

- Seals (GZFJ)
- Terostat sealants
- Other diameters



Ø	Code	Ød mm	Weight kg
80*	GAAJ000001	81.5	0.07
100*	GAAJ000002	101.5	0.09
120*	GAAJ000003	121.5	0.11
125*	GAAJ000004	126.5	0.11
140	GAAJ000005	141.5	0.12
150	GAAJ000006	151.5	0.13
160	GAAJ000007	161.5	0.13
180	GAAJ000008	181.5	0.14
200	GAAJ000009	201.5	0.15
225	GAAJ000010	226.5	0.15
250	GAAJ000011	251.5	0.16
275	GAAJ000012	276.5	0.17
300	GAAJ000014	301.5	0.18
315	GAAJ000015	316.5	0.19
350	GAAJ000016	351.5	0.23
400	GAAJ000017	401.5	0.25
450	GAAJ000018	451.5	0.28
500	GAAJ000019	501.5	0.30
550	GAAJ000020	551.5	0.33
600	GAAJ000021	601.5	0.36