
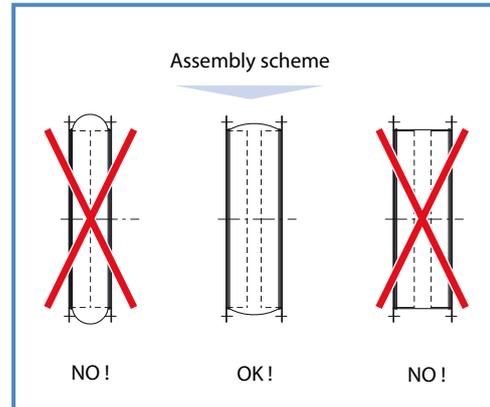


CENTRIFUGAL FANS - ACCESSORIES

5. FLEXIBLE CONNECTIONS

INLET FLEXIBLE CONNECTION - clean air

Use : designed to prevent the transmission of vibration to the ducts.

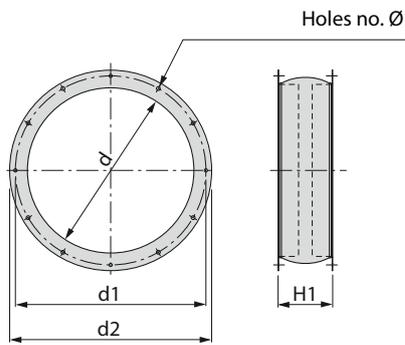

H1 is the coupling installation height. H2 is the height of the fully extended coupling and not the coupling dimension in working conditions.

d x holes no.	CODE	d1	d2	ø	H1	H2
130x4	GA3 0130 A	165	190	10	145	170
130x4	GA3 0130 B	150	170	10	145	170
145x8	GA3 0151 A	182	215	10	145	170
165x8	GA3 0169 A	200	235	10	145	170
185x8	GA3 0182 A	219	255	10	145	170
205x8	GA3 0203 A	241	275	10	145	170
228x8	GA3 0220 A	265	298	10	145	170
255x8	GA3 0255 A	292	325	12	145	170
285x8	GA3 0285 A	332	370	12	145	170
315x8	GA3 0315 A	366	405	12	145	170
355x8	GA3 0355 A	405	445	12	145	170
400x12	GA3 0400 A	448	490	12	145	170
400x8	GA3 0400 B	448	490	12	145	170
455x12	GA3 0450 A	497	540	12	145	170
455x8	GA3 0450 B	497	540	12	145	170
500x12	GA3 0500 A	551	590	14	145	170
500x8	GA3 0500 B	551	590	14	145	170
560x12	GA3 0560 A	629	670	14	180	205
560x16	GA3 0560 B	629	670	14	180	205
635x12	GA3 0630 A	698	740	14	180	205
635x16	GA3 0630 B	698	740	14	180	205
710x16	GA3 0710 A	775	821	14	180	205
800x16	GA3 0800 A	861	911	14	180	205
900x16	GA3 0900 A	958	1011	14	180	205
1007x24	GA3 1000 A	1067	1111	17	230	255
1007x16	GA3 1000 B	1067	1111	17	230	255
1130x24	GA3 1120 A	1200	1251	17	230	255
1250x24	GA3 1250 A	1337	1381	17	230	255
1420x32	GA3 1420 A	1491	1540	17	230	255
1610x32	GA3 1610 A	1663	1730	17	230	255
1810x32	GA3 1810 A	1856	1930	18	230	255
2010x32	GA3 2010 A	2073	2130	18	230	255