


AAEC Block traps

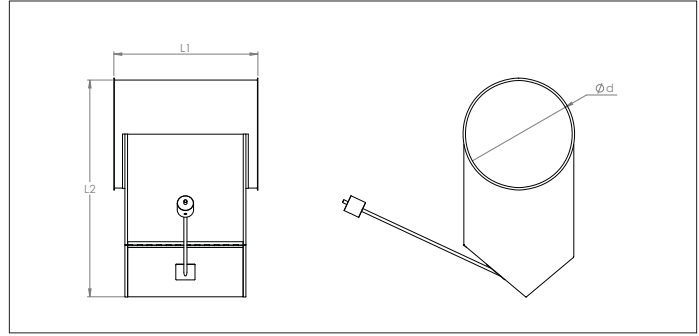

AAEC Block traps

The block traps are designed to stop big parts from going to the fan or the filter for use in overpressure, under-pressure and pressureless systems.

Supplied with a lever on the access door with an adjustable counterweight.

They are mainly used in the wood processing industry and are installed in horizontal ducting lines with the discharge door towards the bottom.

As an option, the blocktrap can be delivered with integrated grill to ensure that the transported material doesn't go further in the ducting.

Material

Sendzimir galvanized DX51 DZ 275 MAC.


Type

Rolled and cut sheets, spot-welded together, with 6 mm edges for lock rings.

Swivel arm on flanged bearings provided with counter-weight.

Options

- with grill
- other diameters
- other sheet thicknesses depending on diameter and length
- other types of edges or connections

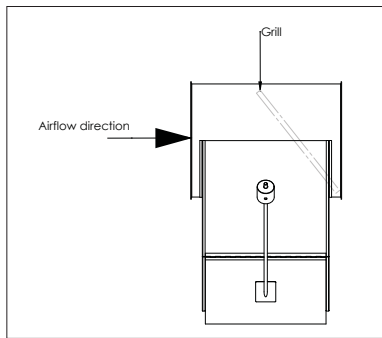

Airflow direction (with optional grill)

❗ Counterweight needs to be adjusted on site depending on the need of the customer.

❗ Horizontal mounting only.

# of outlets	Code	L1 mm	L2 mm	s mm	Weight kg
200	AAEC000001	600	550	0.88	19.50
225	AAEC000002	600	563	0.88	20.50
250	AAEC000003	600	575	0.88	21.70
275	AAEC000004	600	588	0.88	22.50
280	AAEC000013	600	594	0.88	22.60
300	AAEC000005	600	600	0.88	23.00
315	AAEC000006	600	596	0.88	23.50
350	AAEC000007	600	625	0.88	24.10
400	AAEC000008	600	650	0.88	26.00
450	AAEC000009	600	675	0.88	28.00
500	AAEC000010	600	700	0.88	29.90
550	AAEC000011	600	725	0.88	32.00
600	AAEC000012	600	800	0.88	33.50