
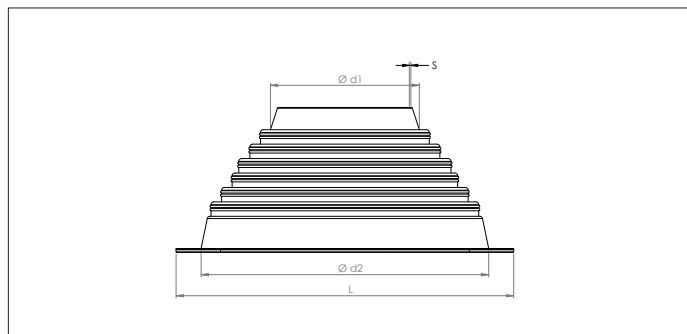


## AZGG Flash roof passages

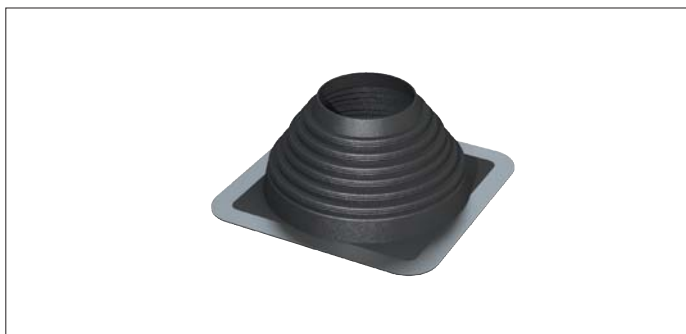

### AZGG Flash roof passages

Very flexible roof passages made of molded EPDM rubber that can be mounted on all kinds of roofs.

The aluminum profile can be adjusted to the roof surface and a storm collar is not necessary with this product.

It is cut to the desired diameter depending on the pipe that is being used.

The passage diameter should be cut 20 mm smaller than the pipe diameter for a tight fit to guarantee a proper sealing.

### Material

EPDM rubber.  
Aluminum profile.

### Type

Preformed EPDM.  
Temperature range : up to +100°C, intermittent up to +135°C.

### Options

- silicone model,  
temperature range : +220°C, intermittent up to +260°C



Assembly example

Ø	Code	Ø d1 mm	Ø d2 mm	L mm	s mm	Weight kg
80 to 160	AZGG000001	70	177	254	3.00	0.35
180 to 280	AZGG000002	140	292	355	3.00	0.69
300 to 500	AZGG000003	241	520	635	3.00	1.92
550 to 700	AZGG000004	305	724	863	3.00	3.24