


Rapid lock rings with PVC insert GAAC

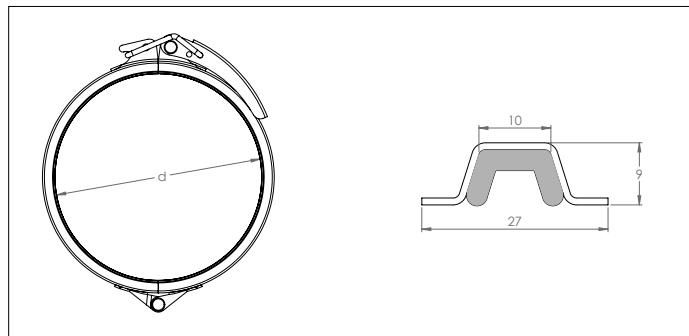

Rapid lock ring with red PVC insert GAAC

Rings with integrated red PVC insert with handle and hinge.

From Ø 80 up to Ø 400 mm with integrated hinge and handle.
From Ø 450 mm, it is supplied without hinge and with an M8x80 bolt.

❗ For assembly of ducting from 0.75 mm up to 1.25 mm.

❗ Maximum tightening torque as of Ø450 : 10 Nm.

Material

Galvanized steel with red PVC insert

Options

- other diameters
- silicone insert for high temperature (up to 200 °C)
- stainless steel AISI 304 (GBAC)



Ø	Code	Ød mm	Weight kg
80	GAAC000001	81.5	0.18
100	GAAC000002	101.5	0.21
120	GAAC000003	121.5	0.23
125	GAAC000021	126.5	0.24
140	GAAC000004	141.5	0.26
150	GAAC000005	151.5	0.27
160	GAAC000006	161.5	0.27
180	GAAC000007	181.5	0.30
200	GAAC000008	201.5	0.32
225	GAAC000009	226.5	0.35
250	GAAC000010	251.5	0.38
275	GAAC000011	276.5	0.41
300	GAAC000012	301.5	0.44
315	GAAC000013	316.5	0.46
350	GAAC000014	351.5	0.50
400	GAAC000015	401.5	0.56
450	GAAC000016	451.5	0.55
500	GAAC000017	501.5	0.61
550	GAAC000018	551.5	0.67
600	GAAC000019	601.5	0.72
630	GAAC000020	631.5	0.76