
Medium FA pipe connector GACB



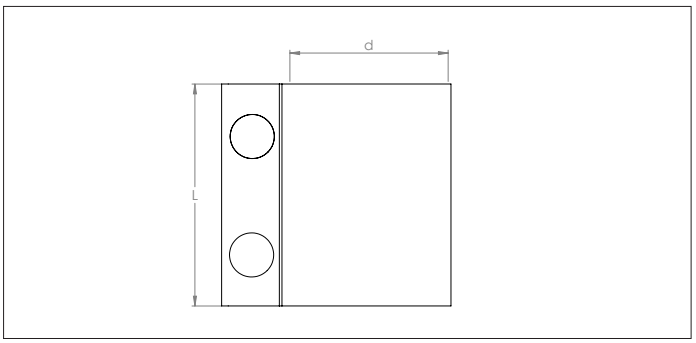

Medium FA pipe connector GACB
Medium pipe connectors with rubber seal and conductive buttons for the assembly of high vacuum components.

The conductivity buttons insure the equipotential connection between the ducting elements.

Standard length of 100 and 150 mm.

Maximum tightening torque of M8 bolt : 16 Nm.

Material
Exterior housing : galvanized steel
Seal : black SBR rubber -30 °C up to +80 °C
Bolts : 2 (100mm) or 3 (150mm) M8 x 30mm galvanized bolts
Conductive buttons : AISI 304L

Options
- none


AISI 304 conductivity button

Ø	Code	Ød	L	Weight
		mm	mm	kg
38	GACB000005	38.1	100	0.35
50	GACB000006	50.0	100	0.50
64	GACB000007	63.5	100	0.55
76	GACB000008	76.1	100	0.38
89	GACB000009	88.9	100	0.41
102	GACB000010	101.6	150	0.70
114	GACB000011	114.3	150	0.75