


Pipe connector GACC

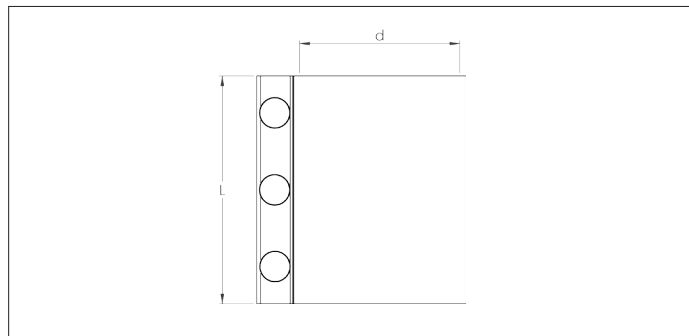

Pipe connectors GACC

Reinforced pipe connectors with rubber seal and conductive buttons for the assembly of high vacuum components. The conductivity buttons insure the equipotential connection between the ducting elements.

- ❗ Standard length of 150 mm.
- ❗ Maximum tightening torque of M12 bolt : 60 Nm.
Maximum tightening torque of M16 bolt : 120 Nm.

Material

Exterior housing : galvanized steel
Seal : white SBR rubber -30 °C up to +80 °C
Bolts : M12 bolts up to Ø 88.9 mm,
M16 for bigger diameters
Conductive buttons : AISI 304L

Options

- other diameters
- stainless steel AISI 304 L with white NBR seal (GBCC)
- other length : 200 mm
- other seals : NBR, Silicone, Viton
- with stabilizing plates
- for assembly of different diameters



AISI 304 conductivity button

Ø	Code	Ød mm	L mm	Weight (L=150) kg
38	GACC000011	38.1	150	0.70
50	GACC000012	50.0	150	0.80
64	GACC000013	63.5	150	0.90
76	GACC000014	76.1	150	1.00
89	GACC000015	88.9	150	1.00
102	GACC000016	101.6	150	1.10
114	GACC000017	114.3	150	1.20
127	GACC000018	127.0	150	1.30
152	GACC000019	152.4	150	1.45
203	GACC000020	203.0	150	1.94