

BABB Bends R=D 15°




BABB Bends R=D - 15°

The pressed bends are made of two preformed halves and longitudinally fully welded together with a sheet thickness of 2.00 mm.

The segmented bends are made of welded segments fully welded together.

These bends are suitable for the transport of waste materials such as dust and chips but also for the transport of grains and such.

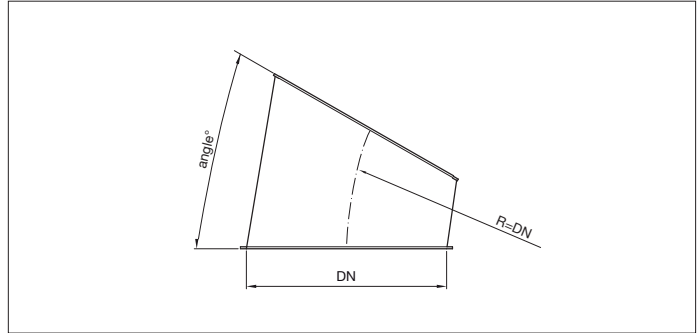

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032.
Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.
Temperature resistance up to +80°C.

Type

Pressed or rolled sheets with 6 mm edges for lock rings.

Options

- FDA and EU compliant food-grade quality
- hot-dipped galvanized or stainless steel execution
- wear resistant lining as of Ø150 (83° Shore), only on segmented models
- equipotential equalization
- other colors
- other diameters
- other sheet thickness, depending on radius and diameter
- other types of edges or connections

* Segmented models

Ø d mm	Code	R mm	# of segments	s mm	Weight kg
100	BABB000136	130	1	2.00	0.21
120	BABB000137	155	1	2.00	0.32
140*	BABB000138	185	1	2.00	0.44
150	BABB000139	250	1	2.00	0.56
160*	BABB000140	265	1	2.00	0.63
175	BABB000141	280	1	2.00	0.70
200	BABB000142	270	1	2.00	0.81
224*	BABB000143	220	1	2.00	0.76
250	BABB000144	310	1	2.00	1.09
280*	BABB000145	280	1	2.00	1.22
300	BABB000146	310	1	2.00	1.34
315*	BABB000147	315	1	2.00	1.40
350*	BABB000148	350	1	2.00	1.75
400*	BABB000149	400	1	2.00	2.35
450*	BABB000150	450	1	2.00	2.95
500*	BABB000151	500	1	2.00	3.50
550*	BABB000152	550	1	2.00	4.20
560*	BABB000153	560	1	2.00	4.40
600*	BABB000154	600	1	2.00	5.00
630*	BABB000155	630	1	2.00	5.50