
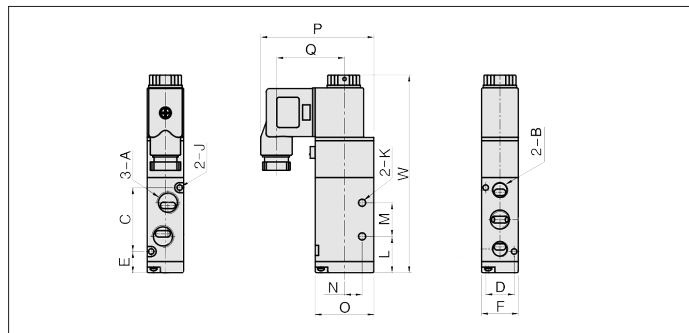


NDCA Solenoid valve for pneumatic sliding dampers

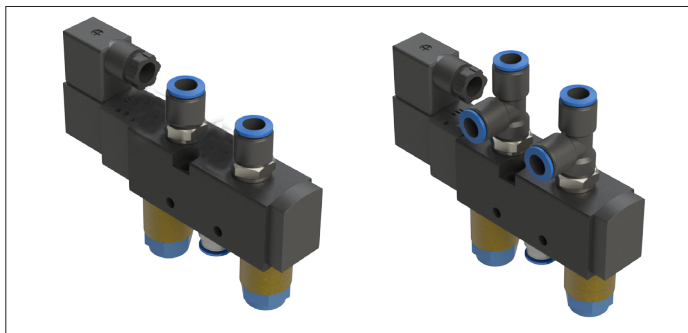

NDCA Solenoid valve for pneumatic sliding dampers

Aluminum alloy body solenoid valve, 5/2 way monostable, activates the pneumatic sliding dampers opening and closing by compressed air.

Airtightness is ensured by NBR gaskets along compressed air rod.

Can be manually operated by activating the button on the body of the valve. The opening and closing speed can be regulated by adjusting the regulators.

Connection to air hose 4/6 mm.

Material


Aluminum alloy body, NBR gaskets.
PVC coated coil and connector protection cap.

Type

With two holes to attach to sliding damper body or other support.
Working temperature range : -5 up to +60 °C.
Protection level : IP 65 (DIN40050).
Insulation class F.
Power consumption : 3 W DC, 3.0 VA AC.

Options

- stainless steel versions
- model for two cylinder control
- bistable version

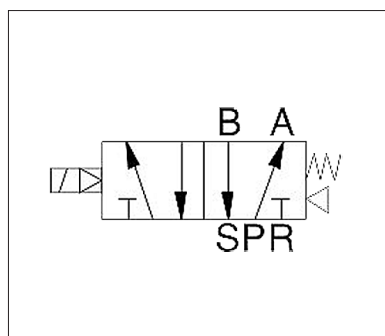

Monostable solenoid valve wiring diagram

❗ Max. air pressure in solenoid valve : 8 Bar
Use only oil free dry air

❗ Please state the voltage when ordering :
24 V AC, 24 V DC, 220 V AC

Model	A mm	B mm	C mm	D mm	E mm	F mm	J mm	K mm	L mm
V5221-06	G1/8	G1/8	38	17	13	22	3.3	4.3	22

Model	M mm	N mm	O mm	P mm	Q mm	W mm	Weight kg
V5221-06	20	10.5	35	67.5	40.5	120	0.29