


BDGE Wall outlets

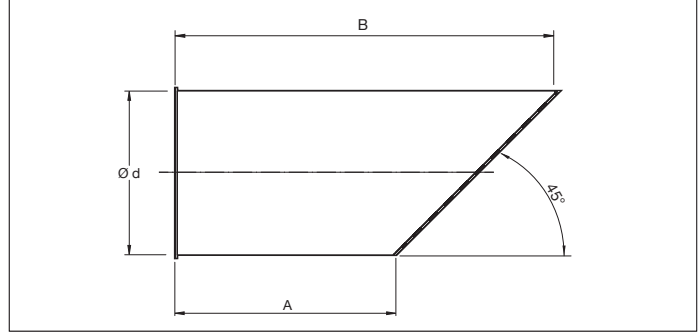

BDGE Wall outlets

Fully welded wall outlets with a sheet thickness of 1.50 mm.

Mounted on a pipe on the outside of a wall as an exhaust, only for horizontal mounting.

With integrated bird screen with a mesh size of 20 x 20 x 2 mm.

Material

1.50 mm hot-dipped galvanized sheet metal.

Temperature resistance up to +80°C.

Galvanization according to DIN 1461 with a thickness of 65 µm.

Type

Rolled sheets with 6 mm edges for lock rings.

Options

- FDA and EU compliant food-grade quality
- stainless steel execution
- equipotential equalization
- other types of edges or connections

Ø d mm	Code	A mm	B mm	s mm	Weight kg
100	BDGE000002	200	305	1.50	0.94
120	BDGE000003	200	325	1.50	1.18
140	BDGE000004	200	340	1.50	1.43
150	BDGE000005	200	355	1.50	1.56
160	BDGE000006	200	365	1.50	1.69
175	BDGE000007	200	380	1.50	1.90
200	BDGE000008	200	405	1.50	2.26
224	BDGE000009	200	425	1.50	2.63
250	BDGE000010	200	455	1.50	3.06
280	BDGE000011	200	485	1.50	3.59
300	BDGE000012	200	505	1.50	3.96
315	BDGE000013	200	520	1.50	4.25
350	BDGE000014	200	560	1.50	4.95
400	BDGE000015	200	605	1.50	6.03
450	BDGE000016	200	655	1.50	7.21
500	BDGE000017	200	710	1.50	8.48
550	BDGE000018	200	760	1.50	9.85
560	BDGE000019	200	765	1.50	10.13
600	BDGE000020	200	805	1.50	11.31
630	BDGE000021	200	835	1.50	12.23