

AAFA silencers - clean air L = 500

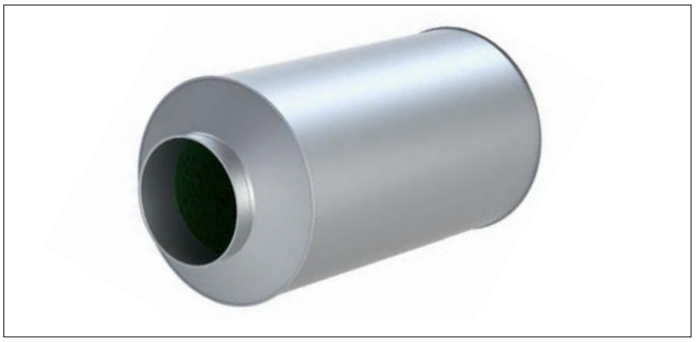

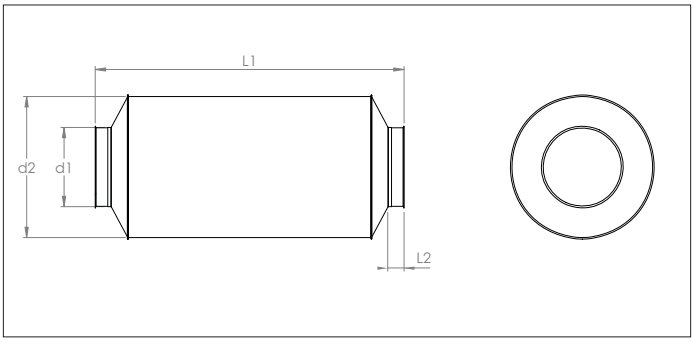

AAFA silencers - clean air L = 500
AAFA silencers are designed to reduce the sound in ducting or in the workshop for use in overpressure, under-pressure and pressureless systems.

The silencers are made of galvanized sheet metal with sound absorbing material applied on the inside.

Material
Sendzimir galvanized
100 mm soundproofing material

Type
Rolled stitch-welded sheets with 6 mm edges for lock rings.

Options
- Other diameters
- Other lengths
- Other sheet thickness
- With perforated sheet metal plate for loaded air
- With Tedlar foil for moist medium
- Stainless steel (AISI 304)
- Painted version
- Other types of edges or connections, see 'edges and connections'


Loaded air version

Ø	Model	Ø d1	Ø d2	L1	L2	s	Weight
		mm	mm	mm	mm	mm	kg
100	AAFA000001	100	300	500	50	0.88	3.66
120	AAFA000002	120	320	500	50	0.88	4.40
140	AAFA000003	140	340	500	50	0.88	5.12
150	AAFA000004	150	350	500	50	0.88	5.50
160	AAFA000005	160	360	500	50	0.88	6.00
180	AAFA000006	180	380	500	50	0.88	7.00
200	AAFA000007	200	400	500	50	0.88	7.50
225	AAFA000008	225	425	500	50	0.88	8.00
250	AAFA000009	250	450	500	50	0.88	8.50
275	AAFA000010	275	475	500	50	0.88	9.00
300	AAFA000011	300	600	500	50	0.88	9.50
315	AAFA000012	315	515	500	50	0.88	11.25
350	AAFA000013	350	550	500	50	0.88	12.50
400	AAFA000014	400	600	500	50	0.88	13.50
450	AAFA000015	450	650	500	50	0.88	15.00
500	AAFA000016	500	700	500	50	0.88	17.70
550	AAFA000017	550	750	500	50	0.88	17.75
600	AAFA000018	600	800	500	50	0.88	19.25