


Flash roof passages

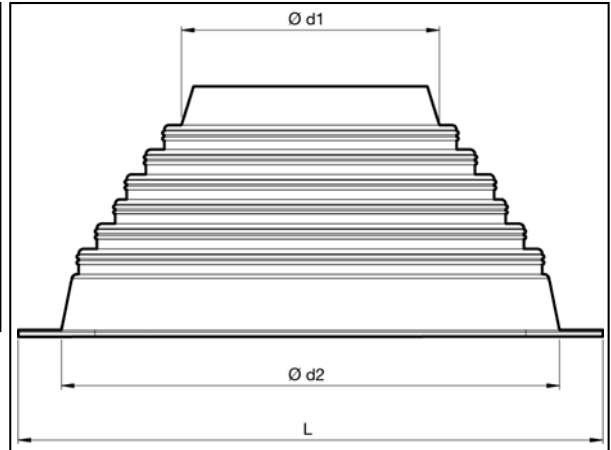

Flash roof passages AWF

The flash roof passages are made of molded EPDM rubber with an integrated aluminum profile.

Because it is very flexible it can be mounted on all kinds of roofs.

The passage can be adjusted to the diameter of the pipe used and is also waterproof.

A storm collar is not necessary with this product.

To guarantee a proper sealing, the passage should normally be 20 mm smaller than the pipe diameter.

Material

EPDM rubber. (up to +100°C, intermittent up to +135°C)

Option

- Silicone model. (up to +220°C, intermittent up to +260°C)

code	$\varnothing d1$ mm	$\varnothing d2$ mm	L mm
AWF4	70	177	254
AWF5	101	209	279
AWF6	121	254	304
AWF7	140	292	355
AWF8	171	343	431
AWF9	241	520	635
AWF12	305	724	863

code	$\varnothing d1$ mm	$\varnothing d2$ mm	L mm
AWF4S	70	177	254
AWF5S	101	209	279
AWF6S	121	254	304
AWF7S	140	292	355
AWF8S	171	343	431
AWF9S	241	520	635
AWF12S	304	724	863