


Rain caps

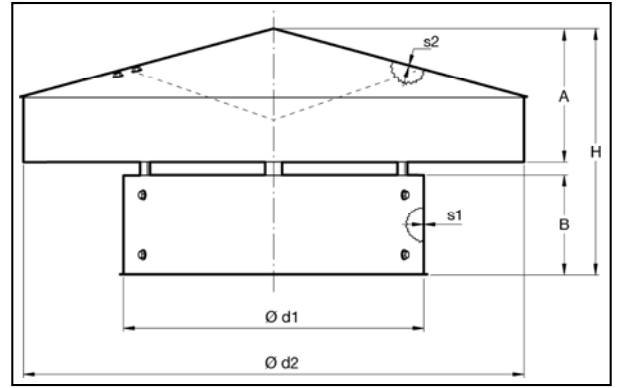

Rain caps AWR

Rain caps are standard spot-welded. Delivery without bird screen.
The cone is attached to the body with 3 legs in 3 mm sheet thickness.
Diameters up to Ø 140 with edge and Ø 150 up to Ø 1000 with edge and inner cone.

Material

Sendzimir galvanized.

Type

Rolled sheets stitch-welded and spot-welded, with a 6 mm edge for lock rings.

Options

- Other diameters
- Customer specific execution
- Other sheet thickness
- With bird screen
- Full welded versions available from 1.25 mm sheet thickness
- Other types of edges or connections, see Tab 14 'edges and connections'

Ø d1 mm	code	Ø d2 mm	H mm	A mm	B mm	s1 mm	s2 mm
80	AWR080	200	130	50	75	0.88	0.88
100	AWR100	200	130	50	75	0.88	0.88
120	AWR120	250	150	50	75	0.88	0.88
140	AWR140	350	190	50	100	0.88	0.88
150	AWR150	350	190	50	100	0.88	0.88
160	AWR160	350	190	50	100	0.88	0.88
180	AWR180	400	220	50	100	0.88	0.88
200	AWR200	400	220	50	100	0.88	0.88
225	AWR225	500	240	50	100	0.88	0.88
250	AWR250	500	240	50	100	0.88	0.88
275	AWR275	500	240	50	100	0.88	0.88
300	AWR300	650	340	100	150	0.88	0.88
315	AWR315	650	340	100	150	0.88	0.88
350	AWR350	650	340	100	150	0.88	0.88
400	AWR400	750	370	100	150	0.88	0.88
450	AWR450	750	370	100	150	0.88	0.88
500	AWR500	950	440	150	150	0.88	0.88
550	AWR550	950	440	150	150	0.88	0.88
600	AWR600	1050	480	150	150	0.88	0.88
630	AWR630	1050	480	150	150	0.88	0.88
650	AWR650	1050	480	150	150	0.88	0.88
700	AWR700	1200	570	200	200	0.88	0.88
750	AWR750	1200	570	200	200	0.88	0.88
800	AWR800	1400	610	200	200	0.88	0.88
850	AWR850	1400	610	200	200	0.88	0.88
900	AWR900	1550	680	250	250	0.88	0.88
950	AWR950	1550	680	250	250	0.88	0.88
1000	AWRM10	1700	720	250	250	0.88	0.88