
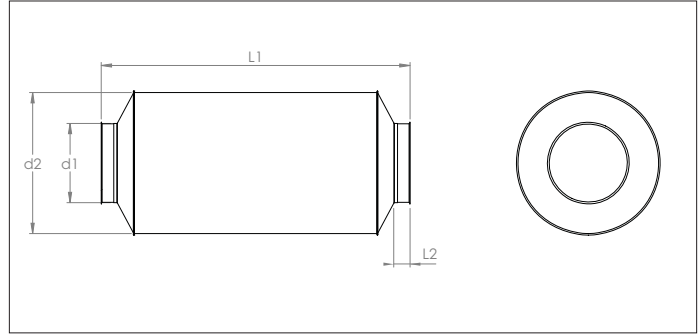


## AAFA silencers - clean air L = 500

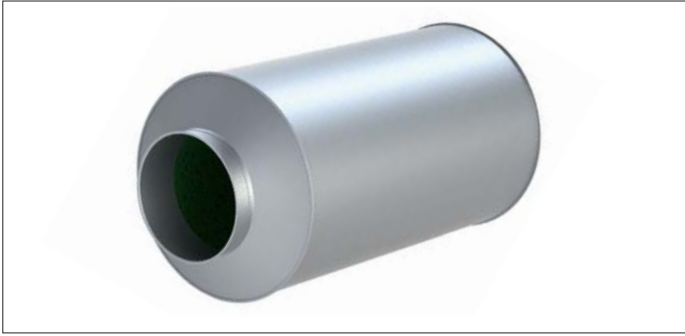

### AAFA silencers - clean air L = 500

AAFA silencers are designed to reduce the sound in ducting or in the workshop for use in overpressure, under-pressure and pressureless systems.

The silencers are made of galvanized sheet metal with sound absorbing material applied on the inside.

### Material

Sendzimir galvanized  
100 mm soundproofing material

### Type

Rolled stitch-welded sheets with 6 mm edges for lock rings.

### Options

- Other diameters
- Other lengths
- Other sheet thickness
- With perforated sheet metal plate for loaded air
- With Tedlar foil for moist medium
- Stainless steel (AISI 304)
- Painted version
- Other types of edges or connections, see 'edges and connections'



| Ø   | Model      | Ø d1<br>mm | Ø d2<br>mm | L1<br>mm | L2<br>mm | s<br>mm | Weight<br>kg |
|-----|------------|------------|------------|----------|----------|---------|--------------|
| 100 | AAFA000001 | 100        | 300        | 500      | 50       | 0.88    | 3.66         |
| 120 | AAFA000002 | 120        | 320        | 500      | 50       | 0.88    | 4.40         |
| 140 | AAFA000003 | 140        | 340        | 500      | 50       | 0.88    | 5.12         |
| 150 | AAFA000004 | 150        | 350        | 500      | 50       | 0.88    | 5.50         |
| 160 | AAFA000005 | 160        | 360        | 500      | 50       | 0.88    | 6.00         |
| 180 | AAFA000006 | 180        | 380        | 500      | 50       | 0.88    | 7.00         |
| 200 | AAFA000007 | 200        | 400        | 500      | 50       | 0.88    | 7.50         |
| 225 | AAFA000008 | 225        | 425        | 500      | 50       | 0.88    | 8.00         |
| 250 | AAFA000009 | 250        | 450        | 500      | 50       | 0.88    | 8.50         |
| 275 | AAFA000010 | 275        | 475        | 500      | 50       | 0.88    | 9.00         |
| 300 | AAFA000011 | 300        | 600        | 500      | 50       | 0.88    | 9.50         |
| 315 | AAFA000012 | 315        | 515        | 500      | 50       | 0.88    | 11.25        |
| 350 | AAFA000013 | 350        | 550        | 500      | 50       | 0.88    | 12.50        |
| 400 | AAFA000014 | 400        | 600        | 500      | 50       | 0.88    | 13.50        |
| 450 | AAFA000015 | 450        | 650        | 500      | 50       | 0.88    | 15.00        |
| 500 | AAFA000016 | 500        | 700        | 500      | 50       | 0.88    | 17.70        |
| 550 | AAFA000017 | 550        | 750        | 500      | 50       | 0.88    | 17.75        |
| 600 | AAFA000018 | 600        | 800        | 500      | 50       | 0.88    | 19.25        |