
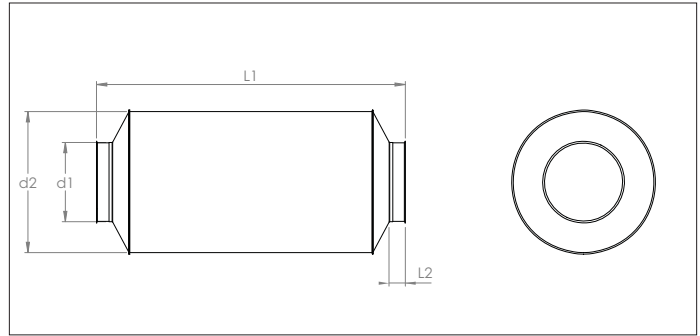


AAFA silencers - clean air L = 2000

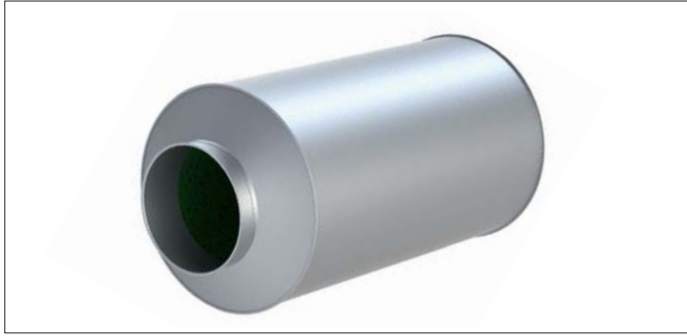

AAFA silencers - clean air L = 2000

AAFA silencers are designed to reduce the sound in ducting or in the workshop for use in overpressure, under-pressure and pressureless systems.

The silencers are made of galvanized sheet metal with sound absorbing material applied on the inside.

Material

Sendzimir galvanized
100 mm soundproofing material

Type

Rolled stitch-welded sheets with 6 mm edges for lock rings.

Options

- Other diameters
- Other lengths
- Other sheet thickness
- With perforated sheet metal plate for loaded air
- With Tedlar foil for moist medium
- Stainless steel (AISI 304)
- Painted version
- Other types of edges or connections, see 'edges and connections'



Loaded air version

Ø	Model	Ø d1 mm	Ø d2 mm	L1 mm	L2 mm	s mm	Weight kg
150	AAFA000138	150	350	2000	50	0.88	22.00
160	AAFA000139	160	360	2000	50	0.88	24.00
180	AAFA000140	180	380	2000	50	0.88	28.00
200	AAFA000141	200	400	2000	50	0.88	30.00
225	AAFA000142	225	425	2000	50	0.88	32.00
250	AAFA000143	250	450	2000	50	0.88	34.00
275	AAFA000144	275	475	2000	50	0.88	36.00
300	AAFA000145	300	600	2000	50	0.88	38.00
315	AAFA000146	315	515	2000	50	0.88	45.00
350	AAFA000147	350	550	2000	50	0.88	50.00
400	AAFA000148	400	600	2000	50	0.88	54.00
450	AAFA000149	450	650	2000	50	0.88	60.00
500	AAFA000150	500	700	2000	50	0.88	66.00
550	AAFA000151	550	750	2000	50	0.88	71.00
600	AAFA000152	600	800	2000	50	0.88	77.00
630	AAFA000153	630	830	2000	50	0.88	85.00
650	AAFA000154	650	850	2000	50	0.88	90.00
700	AAFA000306	700	900	2000	50	0.88	109.00
750	AAFA000307	750	950	2000	50	0.88	123.32
800	AAFA000308	800	1000	2000	50	0.88	132.08
850	AAFA000309	850	1050	2000	50	0.88	142.32
900	AAFA000310	900	1100	2000	50	0.88	147.80
950	AAFA000311	950	1150	2000	50	0.88	160.08
1000	AAFA000312	1000	1200	2000	50	0.88	172.56